

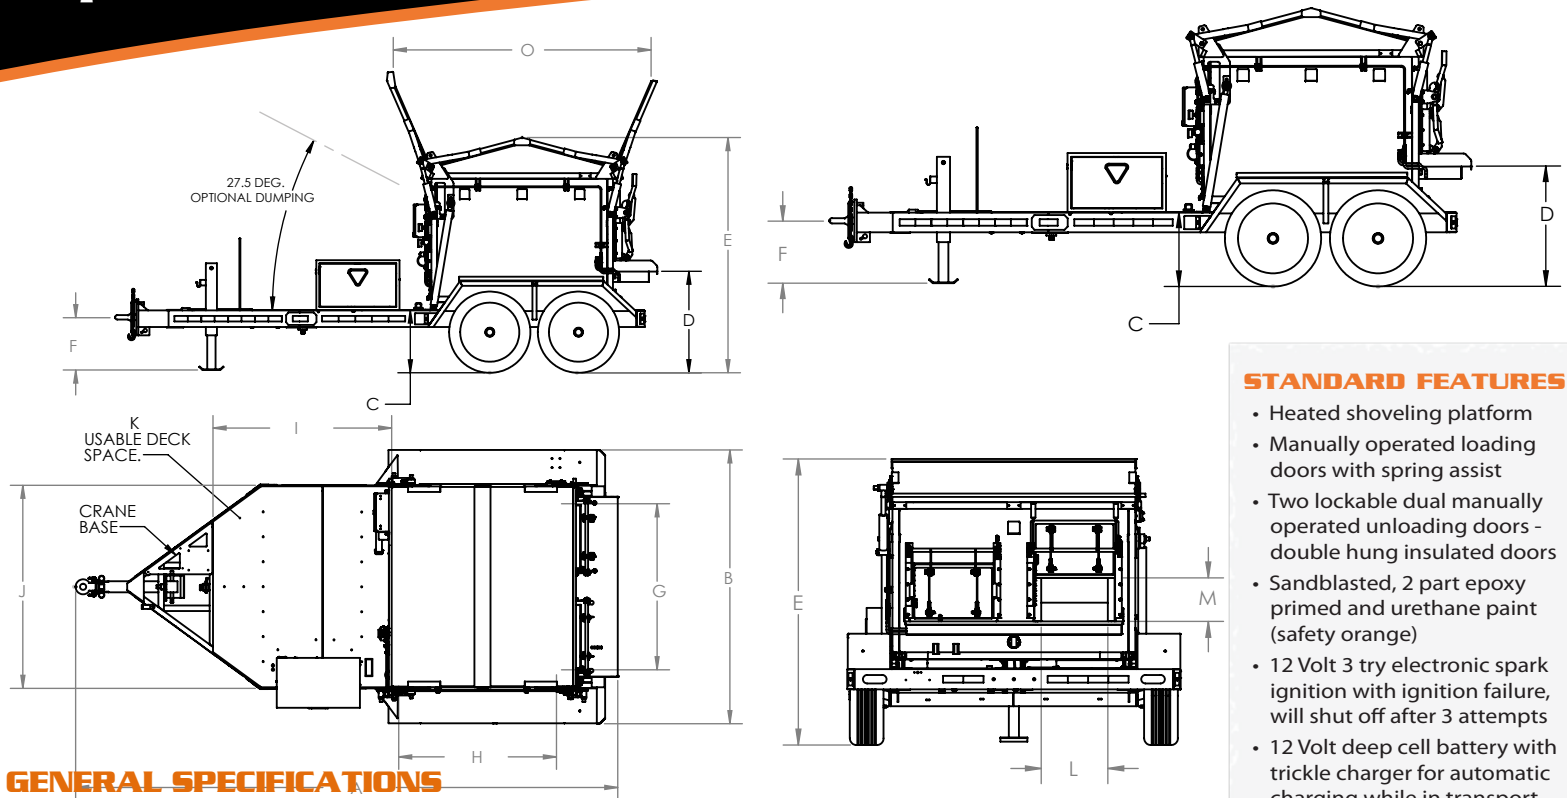

ASPHALT KINGDOM

Trailer Model Asphalt Reclaimer



Available Models: 2THBR-T(D), 3THBR-T(D) & 4THBR-TD

Trailer Model Asphalt Reclaimer



GENERAL SPECIFICATIONS

MODEL		2THBR-T (D)	3THBR-T(D)	4THBR-T (D)
OVERALL LENGTH	A	176-3/8"	196-3/4"	203-5/8"
OVERALL WIDTH	B	98-3/4"	98-3/4"	98-3/4"
DECK HEIGHT	C	21-5/8"	22-5/8"	22-5/8"
HOTBOX CHUTE HEIGHT	D	33-1/2"	33-3/4"	36-5/8"
OVERALL HEIGHT	E	76-1/4"	81-13/16"	90"
CHANNEL HEIGHT	F	21-1/8"	24"	21"
HOTBOX SHOVEL WIDTH	G	60"	59-7/8"	59-7/8"
HOTBOX SHOVEL LENGTH	H	40"	58-7/8"	64-7/8"
TRAILER DECK SPACE LENGTH	I	48"	65-1/2"	58-1/8"
TRAILER DECK SPACE/HOPPER WIDTH	J	72-5/8"	73-1/4"	73-1/4"
TRAILER USEABLE DECK SPACE	K	20 SQ. FT.	30 SQ. FT.	25 SQ. FT.
SHOVEL OPENING WIDTH	L	19-3/4"	19-3/4"	19-3/4"
SHOVEL OPENING HEIGHT	M	13"	13"	13"
LID OPENING	N	91-5/8"	102-1/4"	116"
LID OPENING	O	72-3/4"	94-1/2"	104-3/8"

OTHER SPECIFICATIONS

MODEL		2THBR-T (D)	3THBR-T (D)	4THBR-TD
TRAILER - EMPTY WEIGHT		2950 LBS	3500 LBS	4400 LBS
GROSS WEIGHT		6950 LBS	9500 LBS	12400 LBS
TORSION FLEXRIDE AXLES		(2) 5200 LBS	(2) 5200 LBS	(2) 7000 LBS
WHEELS & TIRES		ST225/75 R15 LRC 6 PLY	ST225/75 R15 LRC 6 PLY	ST235/80 R16 LRC 6 PLY
HOPPER- INFRARED RADIANT HEATERS		25,000 BTU	35,000 BTU	35,000 BTU
HOTBOX CAPACITY		2.4 TONS	3.4 TONS	4.4 TONS
INSULATION		2"	2"	2"
INNER WALL (STAINLESS STEEL)		16 GA.SS	16 GA.SS	16 GA.SS
OUTER WALL (MILD STEEL)		14 GA.	14GA.	14 GA.
HOPPER CONSTRUCTION (MILD STEEL)		11 GA	11 GA	11 GA
LPG 100# VAPOUR – ACME FAST FILL		1	1	1

STANDARD FEATURES

- Heated shoveling platform
- Manually operated loading doors with spring assist
- Two lockable dual manually operated unloading doors - double hung insulated doors
- Sandblasted, 2 part epoxy primed and urethane paint (safety orange)
- 12 Volt 3 try electronic spark ignition with ignition failure, will shut off after 3 attempts
- 12 Volt deep cell battery with trickle charger for automatic charging while in transport
- Combination hour/volt meter
- All flat steel is sprayed with Gator guard for grip
- Pintle hook coupler
- Trailer plug sealed 7 way flat pin RV plug
- Programmable Logic Controller (PLC) with Nema 4 rated enclosure
- Adjustable digital thermostat
- Sealed beam Grote LED lights
- Transport Canada & D.O.T. approved lighting

OPTIONS

- Hydraulic dump & loading doors
- 10 LB fire extinguisher
- SWS 12 volt arrow board
- Grote LED strobe light
- 4 Position tool rack
- Pylon holder
- Night light kit (2 LED flood lights)
- 90,000 BTU torch
- Tool rinse tank
- 100 LPG propane tank with ACME quick fill
- Automatic On/Off timer
- Bomag single drum roller
- 12 Volt 1000 LB crane
- Custom colour